



BakerSeries Triple Wide Roll-in Proofer

Item No. _____
 Project _____
 Quantity _____

MODEL: LRP3 - Series



Model LRP3-40 Shown

MODEL / RACK CAPACITY

Model / Depth	Side Load	End Load	Double
LRP3-30	3 Racks	4 Racks	None
LRP3-40	6 Racks	4 Racks	3 racks
LRP3-50	8 Racks	7 Racks	3 Racks
LRP3-60	10 racks	8 Racks	4 Racks
LRP3-70	10 Racks	10 Racks	5 Racks
LRP3-80	13 Racks	11 Racks	6 Racks
LRP3-90	15 Racks	12 Racks	6 Racks
LRP3-100	15 Racks	14 Racks	7 Racks
LRP3-110	18 Racks	16 Racks	8 Racks
LRP3-120	20 Racks	17 Racks	9 Racks

Short Bid Specification:

Proofer shall be an **LBC Bakery Equipment Model LRP3-** [insert 30, 40, 50, 60, 70, 80, 90, 100, 110, 120] 5 to 13.2kW electrically heated, double door, triple-wide roll-in rack unit with: quick responding air-wash heat / humidity system; modular foam insulated cam lock panel construction; all 300 series stainless steel interior, with protective cart bumpers; heavy-duty door with magnetic seal/mechanical closure system and full width protective bar handle; simple computerized controls, door mounted at eye-level, with accurate digital temperature, humidity and time readouts; plus all the features listed and options checked.

STANDARD PRODUCT WARRANTY

One-Year Parts and Labor (contiguous US Including Alaska and Hawaii, Canada)

Construction Features

- Two Door, triple wide rack capacity
- Heavy duty stainless steel exterior with 300 Series stainless steel interior and aluminized steel top
- Walls Ceilings and doors are foam insulated
- Modular wall and ceiling panels with cam lock construction
- Rapid responding air-wash heat and humidity system
- 208/240 VAC single or 3-phase power, field convertible

Performance Features

- 70 - 120 Degree F proofing range
- 50 - 99% humidity range
- Non-submerged calrod type heaters
- Interior bumpers protect interior walls from damage
- Lighted interior

Controls Features

- All digital controls mounted in the door at eye-level
- PID Type controls for rapid accurate response without overshoot
- Digital set Temperature, Humidity, Time
- Installed in the left hand door at eye-level
- Large LED displays



Meets UL 763 and NSF-8 Standards

Sheet Number LRP3 v 8 (rev 07/06)



BakerSeries Triple Wide Roll-In Proofer

MODEL: LRP3 -Series


INSTALLATION REQUIREMENT

Ships KD requires on-site installation
 Either 208 or 240 VAC 1 or 3-phase

1/2" NPT Cold water connection
 1/2" PVC vented drain connection

OPTIONS & ACCESSORIES

Stainless Steel Floor

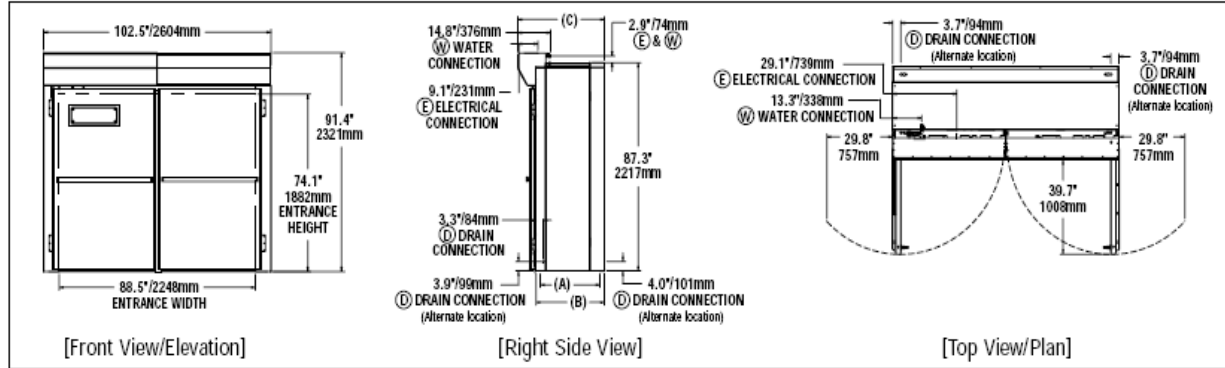

Model	Height		Width		Depth			Weight		Freight Class
	Int	Ext	Int	Ext	Internal "A"	Ext. "B"	Over All "C"	Actual	Ship	
LRP3-30	74.1"	91.4"	96.6"	102.5"	26.0"	31.0"	39.3"	1372	1472	70
LRP3-40					36.1"	41.1"	49.4"	1457	1582	70
LRP3-50					46.1"	51.1"	59.4"	1597	1722	70
LRP3-60					56.1"	61.1"	69.4"	1707	1832	70
LRP3-70					66.2"	71.2"	79.5"	1817	1942	70
LRP3-80					76.2"	81.2"	89.5"	1957	2082	70
LRP3-90					86.2"	91.2"	99.5"	2220	2345	70
LRP3-100					96.2"	101.2"	109.5"	2354	2479	70
LRP3-110					106.3"	111.3"	119.6"	2494	2619	70
LRP3-120					116.3"	121.3"	129.6"	2604	2729	70

Electrical Requirements by Model

Model	Voltage	Total kW	1-Phase	3-Phase	Water	Drain
LRP3-(40 - 80)	208 VAC	5	24.0 AMPS	13.8 AMPS	1/2" NPT .07 GPM @ 60 PSI	1/2"PVC; 210 F; <1 GPM Max.
	240 VAC	6.6	27.5 AMPS	15.8 AMPS		
LRP3-(90-120)	208 VAC	10.2	48.0 AMPS	26.6 AMPS	1/2" NPT .14 GPM @ 60 PSI	1/2"PVC; 210 F; <1 GPM Max.
	240 VAC	13.2	55.0 AMPS	31.6 AMPS		

IMPORTANT: Your local water conditions may damage your LBC appliance. Failure to properly treat water may result in damage and may void your warranty. Ensure that your water supply meets these minimum water quality specification.

Parameter	Unit	Value
Alkalinity	ppm	22
Aluminum	ppb	17
Calcium	ppm	3.3
Free Chlorine Residual	ppm	0.6

Parameter	Unit	Value
Magnesium	ppm	0.65
pH	s.u.	8.5
Sodium	ppm	8.5
Total Hardness	ppm	11.9