

BPW3S**TRIPLE WIDE PROOF BOX****STANDARD FEATURES**

- Low profile, 94" overall height
- Patented air flow system
- Easy access heat and humidity system
 - Internally mounted
 - No flushing required
- Two doors with no center jamb
- Eye-level digital control panel
 - Set heat/humidity system
 - Four independent timers
- Stainless steel interior and exterior
- Modular panel construction with cam lock attachment
- Field assembled - shipped KD
- Flush floor - no ramp required

OPTIONS & ACCESSORIES

- Pass-Thru
- S/S floor
- Windows in doors
- Interior light
- Prison safety package
- Upper side trim - 1 or 2 sides

MODEL CONFIGURATIONS

- 40.5"D**
Four Single End Load Racks,
Six Single Side Load Racks,
or Three Double Racks
- 60.5"D**
Eight Single End Load or Side Load Racks,
or Three Double Racks
- 80.5"D**
Eleven Single End Load Racks,
Twelve Single Side Load Racks
or Six Double Racks
- 100.5"D**
Twelve Single End Load Racks,
Fifteen Single Side Load Racks
or Six Double Racks
- 120.5"D**
Sixteen Single End Load Racks,
Eighteen Single Side Load Racks
or Nine Double Racks


**BAXTER**

PRINTED IN USA 5/07

BPW3S

19220 STATE ROUTE 162 EAST • ORTING, WA 98360
 (360) 893-5554 • CUST SVC: (800) 777-2828 • FAX: (360) 893-6836 • www.baxtermfg.com

BPW3S SPECIFICATIONS

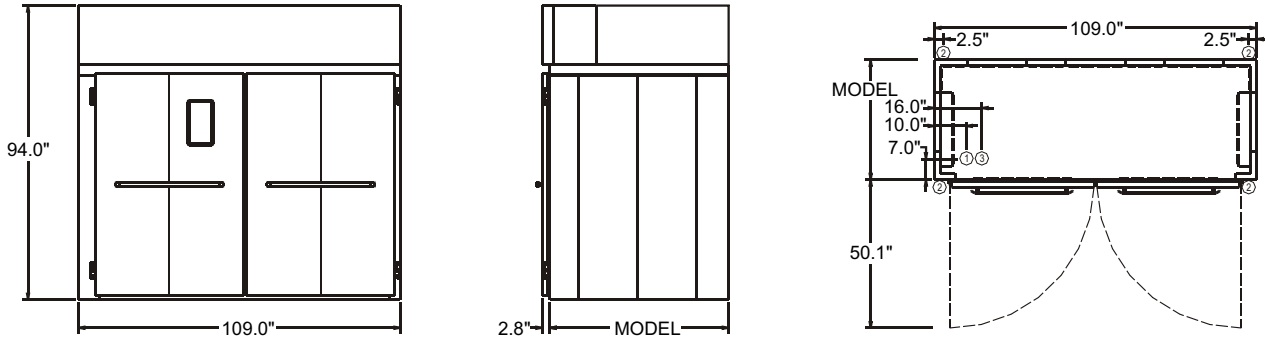

**74" max.
Rack Height**

Frt. Class: 85

PHYSICAL DATA	MODEL 40.5"D	MODEL 60.5"D
Interior Dimensions	37.8"D x 95.0"W 95.9cm x 241.3cm	57.8"D x 95.0"W 146.7cm x 241.3cm
Exterior Dimensions	43.3"D x 109.0"W x 94.0"H 109.9cm x 276.9cm x 238.8cm	63.3"D x 109.0"W x 94.0"H 160.7cm x 276.9cm x 238.8cm
Net Door Opening Height	74.5" / 189.2cm	74.5" / 189.2cm
Net Door Opening Width	94.7" / 240.5cm	94.7" / 240.5cm
Power Input with Neutral*	208-240V/3/32.0-37.0A	208-240V/3/32.0-37.0A
KD Shipping Info (Crate dims & approx. wgt)	127.5"D x 44.5"W x 65.5"H Contact factory for weights.	127.5"D x 44.5"W x 65.5"H Contact factory for weights.

PHYSICAL DATA	MODEL 80.5"D	MODEL 100.5"D	MODEL 120.5"D
Interior Dimensions	77.8"D x 95.0"W 197.5cm x 241.3cm	97.8"D x 95.0"W 248.3cm x 241.3cm	117.8"D x 95.0"W 299.1cm x 241.3cm
Exterior Dimensions	83.3"D x 109.0"W x 94.0"H 211.5cm x 276.9cm x 238.8cm	103.3"D x 109.0"W x 94.0"H 262.4cm x 276.9cm x 238.8cm	123.3"D x 109.0"W x 94.0"H 313.1cm x 276.9cm x 238.8cm
Net Door Opening Height	74.5" / 189.2cm	74.5" / 189.2cm	74.5" / 189.2cm
Net Door Opening Width	94.7" / 240.5cm	94.7" / 240.5cm	94.7" / 240.5cm
Power Input with Neutral*	208-240V/3/35.5-39.5A	208-240V/3/35.5-39.5A	208-240V/3/35.5-39.5A
KD Shipping Info (Crate dims & approx. wgt)	127.5"D x 44.5"W x 65.5"H Contact factory for weights.	127.5"D x 44.5"W x 65.5"H Contact factory for weights.	127.5"D x 44.5"W x 65.5"H Contact factory for weights.

UTILITIES & NOTES

- Water:** 1/2" FNPT cold water 30-80 psi at 85"AFF (215.9 cm).
NOTE: Water supply must have the proper hardness, pH & chloride concentration. Consult your local water company and/or water conditioner dealer before installation.
Recommended water hardness range: 2-4 grains per gallon.
Recommended pH range: 7.0 to 8.0.
Acceptable range for chloride concentration: 0-30 ppm.
- Drain:** 1/2" FNPT, front or rear drain at 5"AFF (12.7 cm). Rte to air-gap drain.
- Power:** Provide connection(s) at 85"AFF (215.9 cm). See chart above for specific information.
*Neutral wire circuitry needed to provide 110-120V for control components. A separate line may be run or a transformer will be required if 110-120V is not available.

Installation: Floor should be level within 1/8" per foot for proper installation. Slope should not exceed 3/4" in all directions under the unit.

SHORT SPECIFICATION

The proofer shall be of stainless steel construction, manufactured in the United States by Baxter Mfg. The unit footprint shall be no wider than 109.0" and have an overall height of 94.0". Built using modular panel construction with cam lock attachment, the proofer shall incorporate foam insulation and gaskets to form a strong, energy efficient enclosure. Interior bumpers shall protect the interior on all sides.

The proofer shall include eye level, digital controls in one door, a patented air flow system, and a flush floor. No ramp is required for this unit. The controls will independently set temperature and humidity for precise proofing control. Four individual count-down timers for products with different time requirements shall be provided. The air flow system will include an internally mounted humidifier. No flush cleaning is required. Although 3 racks wide, the unit must have only two doors; hinged so as to not require a center jamb; giving maximum access to the proofer interior.

The proofer will bear the following agency approvals: UL for safety and sanitation.

Manufacturer reserves the right to make changes in sizes and specifications.



BPW3S

BAXTER

PRINTED IN USA 5/07

19220 STATE ROUTE 162 EAST • ORTING, WA 98360
(360) 893-5554 • CUST SVC: (800) 777-2828 • FAX: (360) 893-6836 • www.baxtermfg.com